

PLIABLE CORRUGATED TUBES OF THE "GEMINIplus" CSST TUBING SYSTEM BY PSP

**DESCRIPTION**

Double separable pre-insulated with sensor cable CSST pliable corrugated tubes in stainless steel with thermal insulations for thermal solar plants (indoor and outdoor installations) suitable also for drinking water.

**APPLICATION FIELDS**

Thermal solar plants with water or water/glycol mixtures as heat carrier and also plants for the supply of hot and cold fluids <sup>(1) (2)</sup>:

- nominal pressure (20°C): PN 16;
- maximum working pressure at 150°C: 10 bar (1,0 MPa);
- maximum working temperature: 150°C (175°C for short time);
- minimum working temperature: -50°C.



The thermal solar plants must be installed in accordance with all the existing municipal, regional and national regulations and the instructions by PSP.


**COMPONENTS**

- **Tube:** CSST pliable corrugated tube type 3 annular with wide pitch <sup>(3)</sup> conform to EN ISO 10380 in stainless steel conform to EN 10028-7 type 1.4301 - X5CrNi18-10 (AISI 304).
- **Thermal insulation:** closed cell expanded EPDM 13 mm thick, high temperature resistant with external tear-proof and UV resistant protective coating:
  - thermal conductivity at 0°C:  $\lambda \leq 0,038$  W/m K,
  - thermal conductivity at 40°C:  $\lambda \leq 0,042$  W/m K,
  - water vapor diffusion resistance factor:  $\mu \geq 3000$ ,
  - fire reaction class: D-s3-d0
- **Sensor cable:** bipolar flexible flat cable 2x0,50 mm<sup>2</sup> in PVC.

**CERTIFICAZIONI**


- The quality management system of PSP S.r.l. is certified as conform to EN ISO 9001 : 2015 (Bureau Veritas certificate nr. IT308879).
- The "GEMINIplus" CSST pliable corrugated tubes by PSP S.r.l. are certified as conform to EN ISO 10380 : 2012 (Bureau Veritas certificate nr. 900/001).

**DIMENSIONS**

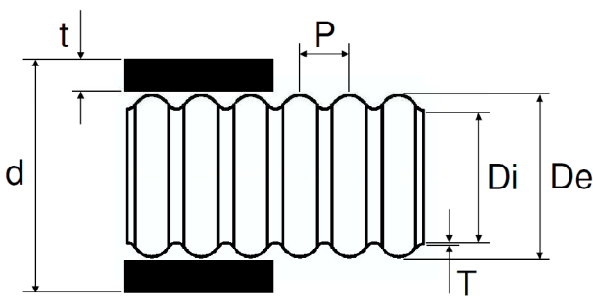

**METHODS OF USE**

- Keep the tubes in their original packaging, in a dry place and sheltered from corrosive substances.
- Before their use, verify the integrity of the tubes.
- Do not pull or twist the tubes.
- It is possible to bend by hand the tubes complying with the following minimum bending radii:



Nominal dimension	Minimum bending radius Rmin [mm]
DN 15	25
DN 20	30

- Do not submit the tubes to repeated bending.
- For the fastening of the tubes, it is recommended to place a clamp every 2 / 3 meters.

**FITTINGS**

For the pliable corrugated tubes of the "GEMINIplus" CSST tubing system by PSP, two kinds of fittings are suitable:

- **fittings of the flanging system:** the tightness of the junction is obtained through the compression of the plane gasket between the plane surface of the fitting and the flange of the pliable corrugated tube (flanging system);
- **fittings of the no flanging system:** the tightness of the junction is obtained through the compression of O-rings without the flanging of the CSST corrugated tube.




The use of fittings other than those specifically supplied by PSP for the "GEMINIplus" CSST tubing system could not guarantee durable tightness: contact PSP to verify the suitability of fittings from other manufacturers.

Nominal dimension	DN 15	DN 20
Connection thread	3/4"	1"
Thickness T [mm]	0,3	0,3
Internal diameter Di [mm]	15,8	19,7
External diameter De [mm]	20,0	25,0
Pitch P [mm]	5,5	6,4
Lineic surface [m <sup>2</sup> /m]	0,07	0,09
Lineic volume [l/m]	0,25	0,38
Insulation thickness t [mm]	13	13
Insulation external diameter d [mm]	46	51

1) The CSST pliable corrugated tubes are not suitable for the connection of moving appliances and/or parts in relative motion each other: for these purposes use only suitable flexible hoses.  
 2) For fluids different from water or water/glycol mixtures, verify the chemical compatibility of all the components of the tubing system (tubes, fittings, sealing elements and so on).  
 3) For solar thermal plants PSP offers two different systems of CSST pliable corrugated tubing, both functional and suitable:  
 • "GEMINI": CSST tubing system based on pliable corrugated pipes "narrow pitch" type in 1.4404 (AISI 316L) stainless steel with 0.18 / 0,20 mm thickness and nominal pressure PN 10 (operating pressure 6 bar at 150°C): this type of tubes must be joined using the "GeminiFAST" self-flanging fittings or "GeminiQUICK" metal to metal seal fittings;  
 • "GEMINIplus": CSST tubing system based on pliable corrugated tubes "wide pitch" type in 1.4301 (AISI 304) stainless steel with 0,3 mm thickness and nominal pressure PN 16 (operating pressure 10 bar at 150°C): this type of tubes must be joined using fittings of the flanged system or through fittings with seal on O-rings.


THERMAL SOLAR PLANTS WITH THE "GEMINIplus" CSST TUBING SYSTEM BY PSP

PRESSURE DROPS (water at 20°C)

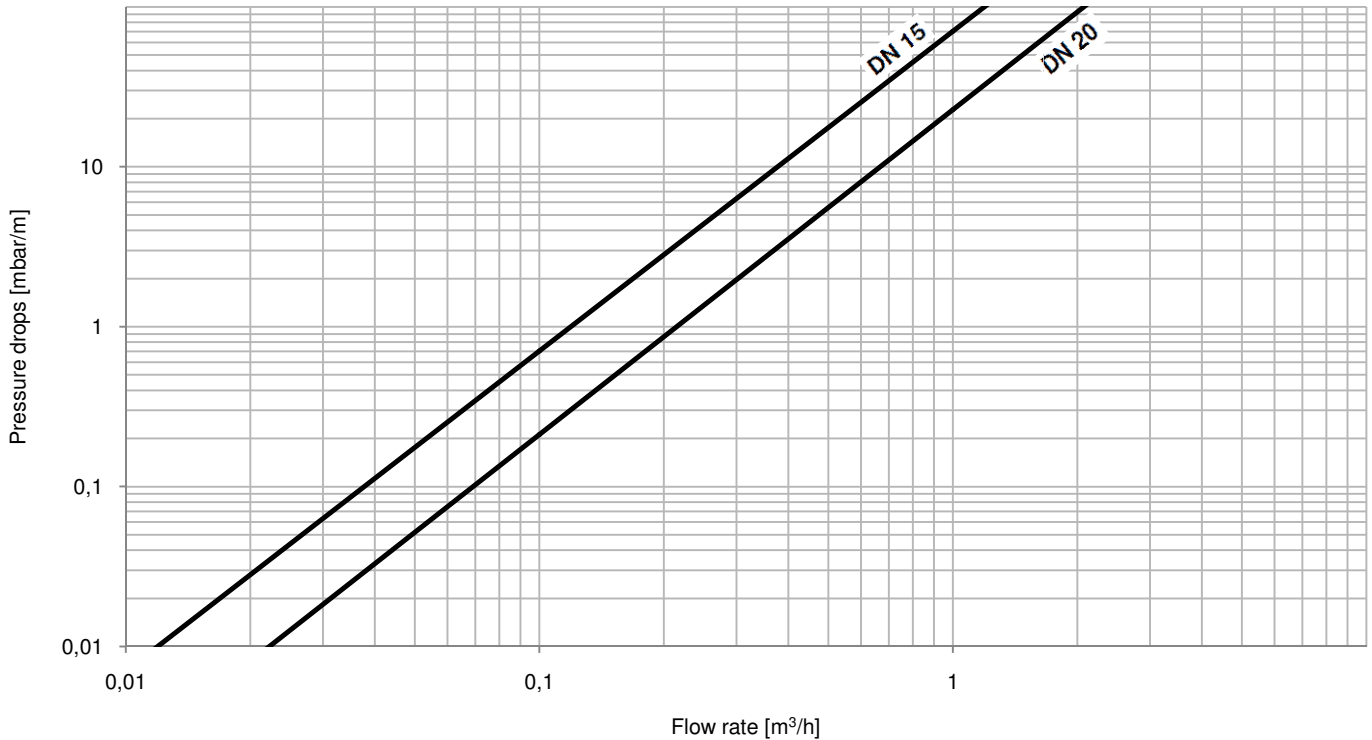

SCHEME OF THERMAL SOLAR PLANT

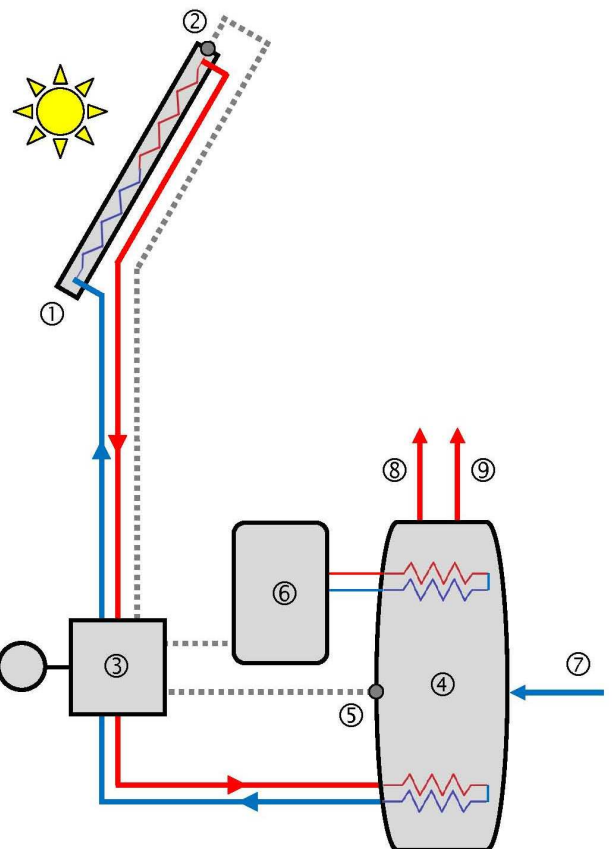


A solar thermal plant converts the solar radiation into heat. Different types of solar thermal system are realizable including those with **natural circulation** (in which is the same sanitary water to be directly heated) and those **combined with forced circulation** (in which to be heated it is a heat transfer fluid, typically a mixture of water and glycol - see schematic illustration at the side) which in summer are able to provide the entire need of domestic hot water and in the winter period preheat the water in the storage tank where it is heated to the final temperature by an auxiliary source (usually a gas boiler) making it usable both for the domestic hot water and for the low temperature underfloor heating.



**In the design and setup of the thermal solar plants with forced circulation, the phenomenon of "stagnation" shall be avoided with the overheating of the heat transfer fluid resulting in resistance / corrosion problems of the system components.**



- ① solar collector / panel
- ② temperature probe of the solar collector / panel
- ③ solar controller integrated with recirculation pump and expansion vessel
- ④ storage tank (solar boiler)
- ⑤ temperature probe of the solar boiler
- ⑥ auxiliary boiler (for example gas boiler)
- ⑦ cold water feed
- ⑧ hot water sanitary plant feed
- ⑨ heating plant feed

-  hot fluids pipelines
-  cold fluids pipelines
-  sensor cable